



# POWER DISTRIBUTION BLOCKS & TERMINALS


電源分配模組  
端子台



# 分流端子台

## UG 080 單相分流


尺寸 (Dimension)	66x27x46 (mm)
額定電壓 (Ui)	1000V AC/DC
額定電流 (Ie)	80 A
短時耐受電流 (Icw)	3 kA
額定峰值電流 (Ipk)	22 kA



接口數 (Poles)	線徑 (Wire)	扭力 (Torque)
入線側 Line side  × 1	6-16 mm <sup>2</sup>	3.5 Nm
負載側 Load side  × 6	2.5-6 mm <sup>2</sup> (x4) 2.5-16 mm <sup>2</sup> (x2)	1.2 Nm 3.5 Nm

## UG 125 單相分流

尺寸 (Dimension)	77x29x46 (mm)
額定電壓 (Ui)	1000V AC/DC
額定電流 (Ie)	125 A
短時耐受電流 (Icw)	4.2 kA
額定峰值電流 (Ipk)	30 kA




接口數 (Poles)	線徑 (Wire)	扭力 (Torque)
入線側 Line side  × 1	10-35 mm <sup>2</sup>	8.5 Nm
負載側 Load side  × 7	6-16 mm <sup>2</sup> (x1) 2.5-16 mm <sup>2</sup> (x6)	3.5 Nm 3.5 Nm

跨接配件 Jumper UG-SA

## UG 160 單相分流

尺寸 (Dimension)	77x29x46 (mm)
額定電壓 (Ui)	1000V AC/DC
額定電流 (Ie)	160 A
短時耐受電流 (Icw)	11.8 kA
額定峰值電流 (Ipk)	30 kA




接口數 (Poles)	線徑 (Wire)	扭力 (Torque)
入線側 Line side  × 1	10-70 mm <sup>2</sup>	8.5 Nm
負載側 Load side  × 7	6-16 mm <sup>2</sup> (x1) 2.5-16 mm <sup>2</sup> (x6)	3.5 Nm 3.5 Nm

跨接配件 Jumper UG-SA

## UG 175 單相分流


尺寸 (Dimension)	71x46.5x45 (mm)
額定電壓 (Ui)	690V AC/DC
額定電流 (Ie)	175 A
短時耐受電流 (Icw)	11 kA
額定峰值電流 (Ipk)	30 kA



接口數 (Poles)	線徑 (Wire)	扭力 (Torque)
入線側 Line side  × 1	16-70 mm <sup>2</sup>	5 Nm
負載側 Load side  × 10	2.5-16 mm <sup>2</sup> (x10)	3 Nm

## UG 250 單相分流


尺寸 (Dimension)	96x46x50 (mm)
額定電壓 (Ui)	1000V AC/DC
額定電流 (Ie)	250 A
短時耐受電流 (Icw)	24.5 kA
額定峰值電流 (Ipk)	51 kA



接口數 (Poles)	線徑 (Wire)	扭力 (Torque)
入線側 Line side  × 1	35-120 mm <sup>2</sup>	19 Nm
負載側 Load side  × 11	6-35 mm <sup>2</sup> (x2) 2.5-16 mm <sup>2</sup> (x5) 2.5-10 mm <sup>2</sup> (x4)	4.4 Nm 2.7 Nm 2.7 Nm

## UG 400 單相分流


尺寸 (Dimension)	96x46x50 (mm)
額定電壓 (Ui)	1000V AC/DC
額定電流 (Ie)	400 A
短時耐受電流 (Icw)	24.5 kA
額定峰值電流 (Ipk)	51 kA



接口數 (Poles)	線徑 (Wire)	扭力 (Torque)
入線側 Line side  × 1	95-185 mm <sup>2</sup>	25 Nm
負載側 Load side  × 11	6-35 mm <sup>2</sup> (x2) 2.5-16 mm <sup>2</sup> (x5) 2.5-16 mm <sup>2</sup> (x4)	4.4 Nm 2.7 Nm 2.7 Nm

## UG 500 單相分流


尺寸 (Dimension)	96x46x50 (mm)
額定電壓 (Ui)	1000 V AC/DC
額定電流 (Ie)	400 A
短時耐受電流 (Icw)	24.5 kA
額定峰值電流 (Ipk)	51 kA




接口數 (Poles)	線徑 (Wire)	扭力 (Torque)
入線側 Line side  × 1	8X24X1 mm 銅排	10 Nm
負載側 Load side  × 11	6-35 mm <sup>2</sup> (x2) 2.5-16 mm <sup>2</sup> (x5) 2.5-10 mm <sup>2</sup> (x4)	4.4 Nm 2.7 Nm 2.7 Nm

## UG 175-3 三相分流

尺寸 (Dimension)	71x81.5x45 (mm)
額定電壓 (Ui)	690V AC/DC
額定電流 (Ie)	175 A
短時耐受電流 (Icw)	11 kA
額定峰值電流 (Ipk)	30 kA



接口數 (Poles)	線徑 (Wire)	扭力 (Torque)
入線側 Line side  × 3X1	16-70 mm <sup>2</sup>	5 Nm
負載側 Load side  × 3X6	2.5-6 mm <sup>2</sup> (x10)	3 Nm

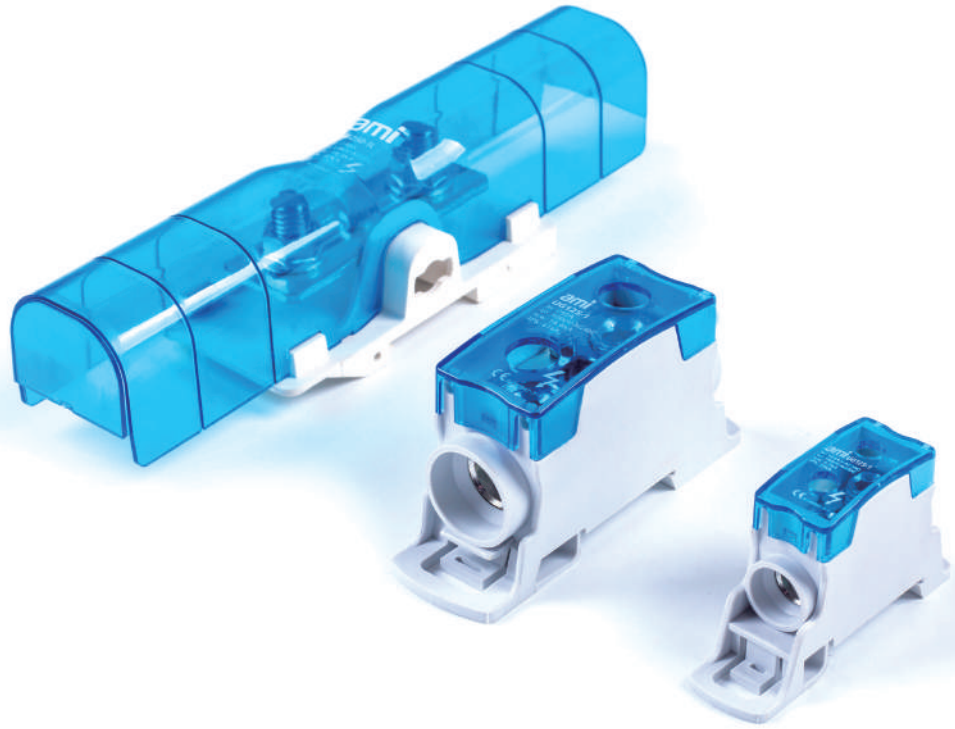

## 動力端子台

# POWER BLOCKS & TERMINALS

### UG 125-3N 三相+N分流

尺寸 (Dimension)	74x99x51 (mm)
額定電壓 (Ui)	690V AC/DC
額定電流 (Ie)	125 A
短時耐受電流 (Icw)	4.4 kA
額定峰值電流 (Ipk)	30 kA



接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	3X1	6-35 mm <sup>2</sup>	1.5 Nm
負載側 Load side	3X7	4-16 mm <sup>2</sup> (x2) 1.5-6 mm <sup>2</sup> (x5)	1.5 Nm 0.8 Nm
負載側 Load side	X11	6-35 mm <sup>2</sup> 4-16 mm <sup>2</sup> (x6) 1.5-6 mm <sup>2</sup> (x4)	1.5 Nm 1.5 Nm 0.8 Nm

### UG 125-1 單極

尺寸 (Dimension)	74x20.2x42.3 (mm)
額定電壓 (Ui)	1000V AC/DC
額定電流 (Ie)	125 A
短時耐受電流 (Icw)	4.2 kA
額定峰值電流 (Ipk)	25 kA



接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	X1	10-35 mm <sup>2</sup>	8.5 Nm
負載側 Load side	X1	10-35 mm <sup>2</sup>	8.5 Nm

### UG 250-1 單極

尺寸 (Dimension)	99.1x31.5x49.4 (mm)
額定電壓 (Ui)	1000V AC/DC
額定電流 (Ie)	250 A
短時耐受電流 (Icw)	14.4 kA
額定峰值電流 (Ipk)	42 kA



接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	X1	35-120 mm <sup>2</sup>	19 Nm
負載側 Load side	X1	35-120 mm <sup>2</sup> (x10)	19 Nm

### UG 250-L 單極

尺寸 (Dimension)	205.7x52.3x50 (mm)
額定電壓 (Ui)	690V AC/DC
額定電流 (Ie)	250 A
短時耐受電流 (Icw)	14.4 kA
額定峰值電流 (Ipk)	42 kA



接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	X1	10-120 mm <sup>2</sup>	螺母配置
負載側 Load side	X1	10-120 mm <sup>2</sup> (x10)	螺母配置

# 二極分流端子台



## UG 207100B

尺寸 (Dimension)	50x64x50 (mm)
額定電壓 (Ui)	500V AC/DC
額定電流 (Ie)	100 A
短時耐受電流 (Icw)	4.5 kA
額定峰值電流 (Ipk)	20 kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	× 1 / 極	10-25 mm <sup>2</sup>	2-3 Nm
		10-25 mm <sup>2</sup>	
負載側 Load side	× 3 / 極	1.5-4 mm <sup>2</sup> 0.75-4 mm <sup>2</sup>	1.2-1.5 Nm
	× 3 / 極	2.5-6 mm <sup>2</sup> 1.5-6 mm <sup>2</sup>	2-3 Nm



## UG 21740B

尺寸 (Dimension)	50x130x50 (mm)
額定電壓 (Ui)	500V AC/DC
額定電流 (Ie)	40 A
短時耐受電流 (Icw)	4.5 kA
額定峰值電流 (Ipk)	22 kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	× 2 / 極	6-16 mm <sup>2</sup>	2-3 Nm
		4-10 mm <sup>2</sup>	
負載側 Load side	× 15 / 極	1.5-4 mm <sup>2</sup> 0.75-4 mm <sup>2</sup>	1.2-1.5 Nm



## UG 211100B

尺寸 (Dimension)	50x100x50 (mm)
額定電壓 (Ui)	500V AC/DC
額定電流 (Ie)	100 A
短時耐受電流 (Icw)	4.5 kA
額定峰值電流 (Ipk)	20 kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	× 2 / 極	10-25 mm <sup>2</sup>	2-3 Nm
		10-25 mm <sup>2</sup>	
負載側 Load side	× 4 / 極	1.5-4 mm <sup>2</sup> 0.75-4 mm <sup>2</sup>	1.2-1.5 Nm
	× 5 / 極	2.5-6 mm <sup>2</sup> 1.5-6 mm <sup>2</sup>	2-3 Nm



## UG 20880B

尺寸 (Dimension)	50x64x50 (mm)
額定電壓 (Ui)	500V AC/DC
額定電流 (Ie)	80 A
短時耐受電流 (Icw)	4.5 kA
額定峰值電流 (Ipk)	20 kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	× 3 / 極	2.5-6 mm <sup>2</sup>	2 Nm
		1.5-6 mm <sup>2</sup>	
負載側 Load side	× 5 / 極	1.5-4 mm <sup>2</sup> 0.75-4 mm <sup>2</sup>	1.2 Nm



## UG 215100B

尺寸 (Dimension)	50x130x50 (mm)
額定電壓 (Ui)	500V AC/DC
額定電流 (Ie)	100 A
短時耐受電流 (Icw)	4.5 kA
額定峰值電流 (Ipk)	20 kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	× 2 / 極	10-25 mm <sup>2</sup>	2-3 Nm
		10-25 mm <sup>2</sup>	
負載側 Load side	× 6 / 極	1.5-4 mm <sup>2</sup> 0.75-4 mm <sup>2</sup>	1.2-1.5 Nm
	× 7 / 極	2.5-6 mm <sup>2</sup> 1.5-6 mm <sup>2</sup>	2-3 Nm



## UG 21880B

尺寸 (Dimension)	50x130x50 (mm)
額定電壓 (Ui)	500V AC/DC
額定電流 (Ie)	80 A
短時耐受電流 (Icw)	4.5 kA
額定峰值電流 (Ipk)	20 kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	× 6 / 極	2.5-6 mm <sup>2</sup>	2 Nm
		1.5-6 mm <sup>2</sup>	
負載側 Load side	× 12 / 極	1.5-4 mm <sup>2</sup> 0.75-4 mm <sup>2</sup>	1.2 Nm



## UG 207125B

尺寸 (Dimension)	50x94x50 (mm)
額定電壓 (Ui)	690V AC/DC
額定電流 (Ie)	125 A
短時耐受電流 (Icw)	4.5 kA
額定峰值電流 (Ipk)	18 kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	× 1 / 極	10-35 mm <sup>2</sup>	6-7 Nm
		10-35 mm <sup>2</sup>	
負載側 Load side	× 5 / 極	2.5-6 mm <sup>2</sup> 1.5-6 mm <sup>2</sup>	2-3 Nm
	× 1 / 極	10-25 mm <sup>2</sup> 6-16 mm <sup>2</sup>	2-3 Nm

# 配件

## UG 215125B



尺寸 (Dimension)	50x162x50(mm)
額定電壓 (Ui)	690V AC/DC
額定電流 (Ie)	125 A
短時耐受電流 (Icw)	4.5 kA
額定峰值電流 (Ipk)	18 kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	× 1 / 極	10-35 mm <sup>2</sup> 10-35 mm <sup>2</sup>	6-7 Nm
負載側 Load side	× 11 / 極	2.5-6 mm <sup>2</sup> 1.5-6 mm <sup>2</sup>	2-3 Nm
	× 3 / 極	10-25 mm <sup>2</sup> 6-16 mm <sup>2</sup>	2-3 Nm

## UG 207125BE



尺寸 (Dimension)	50x64x50(mm)
額定電壓 (Ui)	500V AC/DC
額定電流 (Ie)	125 A
短時耐受電流 (Icw)	4.5 kA
額定峰值電流 (Ipk)	20kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	× 1 / 極	10-35 mm <sup>2</sup> 10-16 mm <sup>2</sup>	2-3 Nm
負載側 Load side	× 1 / 極	10-25 mm <sup>2</sup> 6-16 mm <sup>2</sup>	2-3 Nm
	× 5 / 極	2.5-6 mm <sup>2</sup> 1.5-6 mm <sup>2</sup>	2-3 Nm

## UG 211125BE



尺寸 (Dimension)	50x100x50(mm)
額定電壓 (Ui)	500V AC/DC
額定電流 (Ie)	125 A
短時耐受電流 (Icw)	4.5 kA
額定峰值電流 (Ipk)	20 kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	× 2 / 極	10-35 mm <sup>2</sup> 10-16 mm <sup>2</sup>	2-3 Nm
負載側 Load side	× 2 / 極	10-25 mm <sup>2</sup> 6-16 mm <sup>2</sup>	2-3 Nm
	× 7 / 極	2.5-6 mm <sup>2</sup> 1.5-6 mm <sup>2</sup>	2-3 Nm

## UG 215125BE



尺寸 (Dimension)	50x130x50(mm)
額定電壓 (Ui)	500V AC/DC
額定電流 (Ie)	125 A
短時耐受電流 (Icw)	4.5 kA
額定峰值電流 (Ipk)	20 kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	× 2 / 極	10-35 mm <sup>2</sup> 10-16 mm <sup>2</sup>	2-3 Nm
負載側 Load side	× 2 / 極	10-25 mm <sup>2</sup> 6-16 mm <sup>2</sup>	2-3 Nm
	× 11 / 極	2.5-6 mm <sup>2</sup> 1.5-6 mm <sup>2</sup>	2-3 Nm

## UG-NB125



尺寸 (Dimension)	142
額定電壓 (Ui)	125 A
短時耐受電流 (Icw)	4.5 kA
額定峰值電流 (Ipk)	30 kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	× 3 / 極	10-25 mm <sup>2</sup> 6-16 mm <sup>2</sup>	2-3 Nm
負載側 Load side	× 9 / 極	2.5-6 mm <sup>2</sup> 1.5-6 mm <sup>2</sup>	2-3 Nm

# 四極 分流端子台

## UG 41340B



尺寸 (Dimension)	90x100x50(mm)
額定電壓 (Ui)	500V AC/DC
額定電流 (Ie)	40 A
短時耐受電流 (Icw)	4.5 kA
額定峰值電流 (Ipk)	22 kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	× 2 / 極	6-16 mm <sup>2</sup> 4-10 mm <sup>2</sup>	2-3 Nm
負載側 Load side	× 11 / 極	1.5-4 mm <sup>2</sup> 0.75-4 mm <sup>2</sup>	1.2-1.5 Nm

## UG 40880B



尺寸 (Dimension)	90x64x50(mm)
額定電壓 (Ui)	500V AC/DC
額定電流 (Ie)	80 A
短時耐受電流 (Icw)	4.5 kA
額定峰值電流 (Ipk)	20 kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	× 3 / 極	2.5-6 mm <sup>2</sup> 1.5-6 mm <sup>2</sup>	2 Nm
負載側 Load side	× 5 / 極	1.5-4 mm <sup>2</sup> 0.75-4 mm <sup>2</sup>	1.2 Nm



## UG-NB160


尺寸 (Dimension) 168

額定電壓 (Ui) 160 A

短時耐受電流 (Icw) 6.2 kA

額定峰值電流 (Ipk) 35 kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	× 4 / 極	10-35 mm <sup>2</sup>	2-3 Nm
		10-25 mm <sup>2</sup>	
負載側 Load side	× 9 / 極	2.5-16 mm <sup>2</sup>	2-3 Nm
		1.5-16 mm <sup>2</sup>	

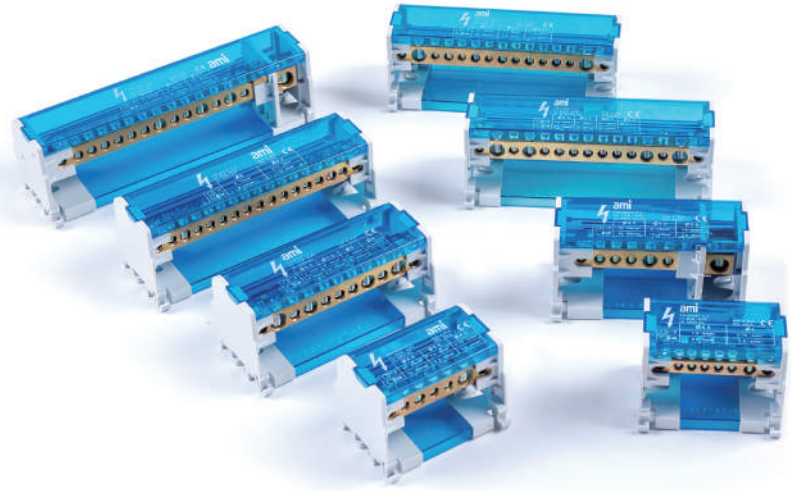

## UG 41380B

尺寸 (Dimension) 90x130x50(mm)

額定電壓 (Ui) 500V AC/DC

額定電流 (Ie) 80 A

短時耐受電流 (Icw) 4.5 kA

額定峰值電流 (Ipk) 20 kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	× 5 / 極	2.5-6 mm <sup>2</sup>	2 Nm
		1.5-6 mm <sup>2</sup>	
負載側 Load side	× 8 / 極	1.5-4 mm <sup>2</sup>	1.2 Nm
		0.75-4 mm <sup>2</sup>	

## UG 41880B

尺寸 (Dimension) 90x130x50(mm)

額定電壓 (Ui) 500V AC/DC

額定電流 (Ie) 80 A

短時耐受電流 (Icw) 4.5 kA

額定峰值電流 (Ipk) 20 kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	× 6 / 極	2.5-6 mm <sup>2</sup>	2 Nm
		1.5-6 mm <sup>2</sup>	
負載側 Load side	× 12 / 極	1.5-4 mm <sup>2</sup>	1.2 Nm
		0.75-4 mm <sup>2</sup>	

## UG 407100B

尺寸 (Dimension) 90x64x50(mm)

額定電壓 (Ui) 500V AC/DC

額定電流 (Ie) 100 A

短時耐受電流 (Icw) 4.5 kA

額定峰值電流 (Ipk) 20 kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	× 1 / 極	10-25 mm <sup>2</sup> 10-25 mm <sup>2</sup>	2-3 Nm
負載側 Load side	× 3 / 極	1.5-4 mm <sup>2</sup> 0.75-4 mm <sup>2</sup>	1.2-1.5 Nm
		2.5-6 mm <sup>2</sup> 1.5-6 mm <sup>2</sup>	

## UG 41100B

尺寸 (Dimension) 90x100x50(mm)

額定電壓 (Ui) 500V AC/DC

額定電流 (Ie) 100 A

短時耐受電流 (Icw) 4.5 kA

額定峰值電流 (Ipk) 20 kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	× 2 / 極	10-25 mm <sup>2</sup> 10-25 mm <sup>2</sup>	2-3 Nm
		1.5-4 mm <sup>2</sup> 0.75-4 mm <sup>2</sup>	
負載側 Load side	× 5 / 極	2.5-6 mm <sup>2</sup> 1.5-6 mm <sup>2</sup>	2-3 Nm
		1.2-1.5 Nm	

## UG 415100B

尺寸 (Dimension) 90x130x50(mm)

額定電壓 (Ui) 500V AC/DC

額定電流 (Ie) 100 A

短時耐受電流 (Icw) 4.5 kA

額定峰值電流 (Ipk) 20 kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	× 2 / 極	10-25 mm <sup>2</sup> 10-25 mm <sup>2</sup>	2~3 Nm
		1.5-4 mm <sup>2</sup> 0.75-4 mm <sup>2</sup>	
負載側 Load side	× 7 / 極	2.5-6 mm <sup>2</sup> 1.5-6 mm <sup>2</sup>	2~3 Nm
		1.2-1.5 Nm	

## UG 407125B

尺寸 (Dimension) 90x109x50(mm)

額定電壓 (Ui) 690 V AC/DC

額定電流 (Ie) 125 A

短時耐受電流 (Icw) 4.5 kA

額定峰值電流 (Ipk) 20 kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	× 1 / 極	10-35 mm <sup>2</sup> 10-35 mm <sup>2</sup>	6-7 Nm
負載側 Load side	× 5 / 極	2.5-6 mm <sup>2</sup> 1.5-6 mm <sup>2</sup>	2-3 Nm
		10-25 mm <sup>2</sup> 6-16 mm <sup>2</sup>	

# 電源分配模組

## DISTRIBUTION BLOCKS

節省空間、安裝簡易、安全靈活

Space saving • Simplify installation • Safety and flexibility



### UG 411125B

尺寸 (Dimension)	90x147x50(mm)
額定電壓 (Ui)	690 V AC/DC
額定電流 (Ie)	125 A
短時耐受電流 (Icw)	4.5 kA
額定峰值電流 (Ipk)	20 kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	X 1 / 極	10-35 mm <sup>2</sup>	6-7 Nm
		10-35 mm <sup>2</sup>	
負載側 Load side	X 7 / 極	2.5-6 mm <sup>2</sup>	2-3 Nm
		1.5-6 mm <sup>2</sup>	
	X 3 / 極	10-25 mm <sup>2</sup> 6-16 mm <sup>2</sup>	2-3 Nm

配件 Neutral Bar UG-NB125



### UG 415125B

尺寸 (Dimension)	90x182x50(mm)
額定電壓 (Ui)	690 VAC/DC
額定電流 (Ie)	125 A
短時耐受電流 (Icw)	4.2 kA
額定峰值電流 (Ipk)	14.5 kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	X 1 / 極	10~35 mm <sup>2</sup>	6~7 Nm
		10~35 mm <sup>2</sup>	
負載側 Load side	X 11 / 極	2.5~6 mm <sup>2</sup>	2~3 Nm
		1.5~6 mm <sup>2</sup>	
	X 1 / 極	10~25 mm <sup>2</sup> 6~16 mm <sup>2</sup>	2~3 Nm
X 2 / 極		10~35 mm <sup>2</sup> 10~25 mm <sup>2</sup>	

配件 Neutral Bar UG-NB125



### UG 412160B

尺寸 (Dimension)	90x175x50(mm)
額定電壓 (Ui)	690 V AC/DC
額定電流 (Ie)	160 A
短時耐受電流 (Icw)	8.2 kA
額定峰值電流 (Ipk)	35 kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	X 1 / 極	10-50 mm <sup>2</sup>	8-10 Nm
		10-50 mm <sup>2</sup>	
負載側 Load side	X 3 / 極	10-35 mm <sup>2</sup>	2-3 Nm
		10-25 mm <sup>2</sup>	
	X 7 / 極	2.5-16 mm <sup>2</sup>	2-3 Nm
1.5-16 mm <sup>2</sup>			
X 1 / 極	2.5-6 mm <sup>2</sup>	2-3 Nm	
	1.5-6 mm <sup>2</sup>		

配件 Neutral Bar UG-NB160



### UG 407125BE

尺寸 (Dimension)	90x64x50(mm)
額定電壓 (Ui)	500 V AC/DC
額定電流 (Ie)	125 A
短時耐受電流 (Icw)	4.5 kA
額定峰值電流 (Ipk)	20 kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	X 1 / 極	10-35 mm <sup>2</sup>	2-3 Nm
		10-16 mm <sup>2</sup>	
負載側 Load side	X 1 / 極	10-25 mm <sup>2</sup>	2-3 Nm
		6-16 mm <sup>2</sup>	
	X 5 / 極	2.5-6 mm <sup>2</sup> 1.5-6 mm <sup>2</sup>	2-3 Nm



### UG 415125BE

尺寸 (Dimension)	90x130x50(mm)
額定電壓 (Ui)	500 V AC/DC
額定電流 (Ie)	125 A
短時耐受電流 (Icw)	4.5 kA
額定峰值電流 (Ipk)	20 kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	X 2 / 極	10-35 mm <sup>2</sup>	2-3 Nm
		10-16 mm <sup>2</sup>	
負載側 Load side	X 2 / 極	10-25 mm <sup>2</sup>	2-3 Nm
		6-16 mm <sup>2</sup>	
	X 11 / 極	2.5-6 mm <sup>2</sup>	2-3 Nm
1.5-6 mm <sup>2</sup>			



### UG 411125BE

尺寸 (Dimension)	90x100x50(mm)
額定電壓 (Ui)	500 V AC/DC
額定電流 (Ie)	125 A
短時耐受電流 (Icw)	4.5 kA
額定峰值電流 (Ipk)	20 kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	X 2 / 極	10-35 mm <sup>2</sup>	2-3 Nm
		10-16 mm <sup>2</sup>	
負載側 Load side	X 2 / 極	10-25 mm <sup>2</sup>	2-3 Nm
		6-16 mm <sup>2</sup>	
	X 7 / 極	2.5-6 mm <sup>2</sup>	2-3 Nm
1.5-6 mm <sup>2</sup>			




### UG 412160BH

尺寸 (Dimension)	90x170x70(mm)
額定電壓 (Ui)	690 V AC/DC
額定電流 (Ie)	160 A
短時耐受電流 (Icw)	8.2 kA
額定峰值電流 (Ipk)	35 kA

接口數 (Poles)		線徑 (Wire)	扭力 (Torque)
入線側 Line side	X 1 / 極	10-50 mm <sup>2</sup>	8-10 Nm
		10-50 mm <sup>2</sup>	
負載側 Load side	X 3 / 極	10-35 mm <sup>2</sup>	2-3 Nm
		10-25 mm <sup>2</sup>	
	X 8 / 極	2.5-16 mm <sup>2</sup>	2-3 Nm
1.5-16 mm <sup>2</sup>			

配件 Neutral Bar UG-NB160

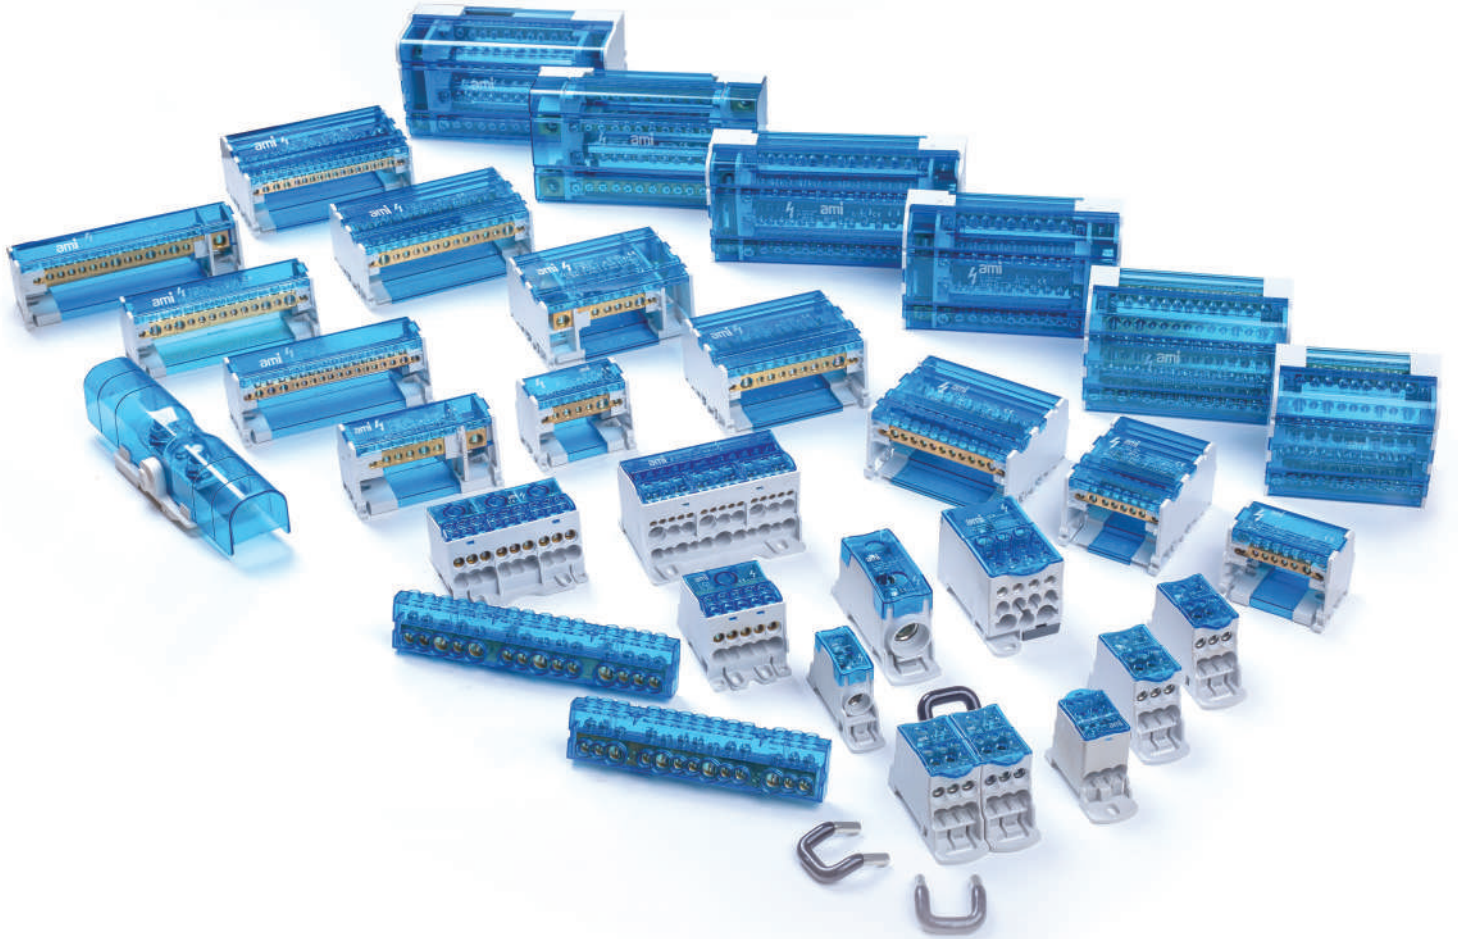

*Space saving • Simplify installation • Safety and flexibility*

節省空間、安裝簡易、安全靈活

**ami**  
Ami-fortune